


## ELEVATOR TRAVELLING CABLES

### FH – PVC

Elevator travelling cable – High rise

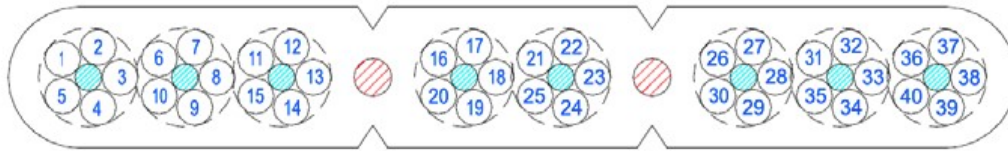

## PRODUCT INFORMATION

<b>APPLICATION</b>	Elevator travelling cable for indoor and panoramic elevators	
<b>INSTALLATION</b>	Installation Follow instructions in Datwyler manual for proper handling and installation Suspension device: LZ 4001 Loop diameter: natural loop	
<b>CONSTRUCTION</b>	Conductors: Insulation: Support members: Outer sheath:	flexible bare Cu strands class 5 acc. to IEC/EN 60228 PVC steel ropes, Ø 2.5 mm PVC
<b>MECHANICAL PROPERTIES</b>	Free suspension length: Travel speed: Operating temperature: Overall dimension (approx.): Total weight (approx.): Copper content:	max. 220 m max. 12 m/s -15 to +70 °C 69.0 x 9.6 mm 1103 kg/km 309 kg/km
<b>ELECTRICAL PROPERTIES</b>	Rated voltage $U_0/U$ :	300/500 V
<b>PROPERTIES OF DATA ELEMENTS</b>	no data elements	
<b>FIRE PERFORMANCE</b>	Flame propagation:	IEC/EN 60332-1-2
<b>COLOUR CODE</b>	Cores: Outer sheath:	black, white numbered 1-40 grey
<b>STANDARD</b>	With reference to EN 50214	

Article no.	Type	No./size of conductors
157219	7877-F	40 x 0.75 mm <sup>2</sup>