



PEW Electrical Distributors

TFT Displays



IRIS 4.3"

High resolution landing and car position indicator




MAIN FEATURES

- Easy configuration via onboard menu or PC with SIRIO Software
- Updating by SD Card
- Customizable background, arrows, floors and signals
- EN 81-70 compliant
- ECO Energy saving system mode (stand-by)
- Easy keypad for the selection of the main features (buzzer volume, communication interface, first floor, brightness, stand-by duration)
- Emergency light functionality
- Communication interface: Vega serial, RS485, CAN, parallel and magnetic sensors
- Mounting: protection case
- Mounting: horizontal and vertical
- Compact design: 110mm x 70mm x 20mm
- OPTION: EN81-71 Vandal Proof Version 10mm Glass with Steel frame

Dimensions: 4.3"
 Visible area: 95.3 x 53.8mm.
 Resolution: 480(RGB) x 320 -QVGA
 Pixel (mm): 0.198x0.198mm.
 Colours: 65,000
 Energy consumption: 220mA
 Power supply: 12/24 Vdc
 Temperature range: -20/+70°C
 Encumbrance: 160x80x22mm



Iris 4.3"



SIRIO


- Intuitive dedicated programming software
- Easily customise your TFT layout
- Inbuilt fonts and arrow design options
- Change display orientation
- Export to microSD Card for display update

PEW Electrical Distributors Ltd

Unit 1 The iO Centre
59-71 River Road
Barking, Essex IG11 0DR


0208 507 1001

sales@pewelectrical.com
www.pewelectrical.com

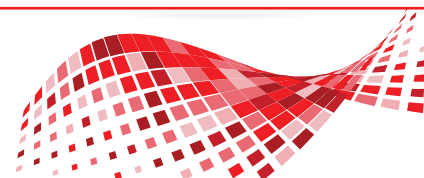

TFT Display


DIMENSIONS

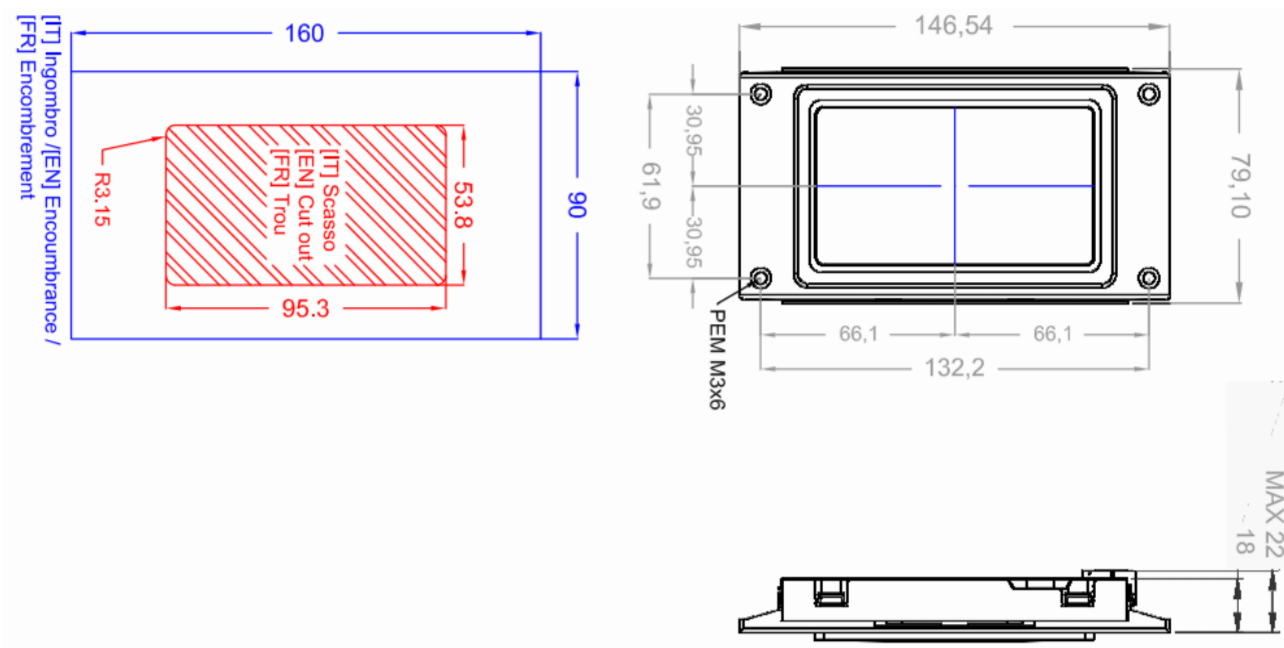

INTERFACES

SNV201:ENC

- RS485 serial encoder board (4-wire) to car & landings
- Binary or Gray inputs
- Maximum 32 stops
- Default or configurable service message inputs
- Configure set-up onboard via buttons
- Inbuilt Speech with speaker included (1W or 5W)
- Update speech using .wav files to MicroSD Card

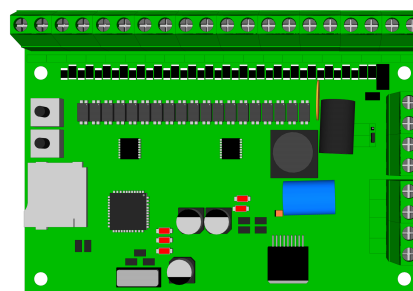

1 PER FLOOR

- Direct input to display
- Maximum 10 stops

PARALLEL INPUT

- Common Positive (Anode)
- Common Negative (Cathode)