



PEW Electrical Distributors

## TFT Displays



## IRIS 7.0"

High resolution car position indicator



### MAIN FEATURES

- Easy configuration via onboard menu or PC with SIRIO Software
- Updating by SD Card
- Customizable background, arrows, floors, logos and signals
- EN 81-70 compliant
- ECO Energy saving system mode (stand-by)
- Easy keypad for the selection of the main features (buzzer volume, communication interface, first floor, brightness, stand-by duration)
- Emergency light functionality
- Communication interface: Vega serial, RS485, CAN, parallel and magnetic sensors
- Mounting: protection case
- Mounting: horizontal and vertical
- Compact design: 110mm x 70mm x 20mm
- OPTION: EN81-71 Vandal Proof Version 10mm Glass with Steel frame



Dimensions: 7.0"  
 Visible area: 154.1 x 86mm.  
 Resolution: 800(RGB) x 480 -WVGA  
 Pixel (mm): 0.1926x0.1179mm  
 Colours: 16m  
 Energy consumption: 360mA  
 Power supply: 12/24 Vdc +/-10%  
 Temperature range: -20/+70°C  
 Encumbrance: 178x166x22mm




Example layouts / graphics



AIDA COP with IRIS 7"

Iris 4.3"



### SIRIO


- Intuitive dedicated programming software
- Easily customise your TFT layout
- Inbuilt fonts and arrow design options
- Change display orientation
- Export to microSD Card for display update

PEW Electrical Distributors Ltd


Unit 1 The iO Centre  
59-71 River Road  
Barking, Essex IG11 0DR

0208 507 1001

sales@pewelectrical.com  
www.pewelectrical.com

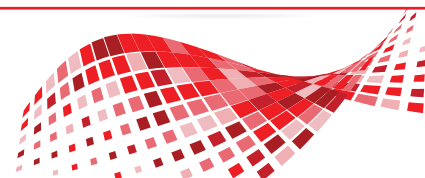


## DIMENSIONS

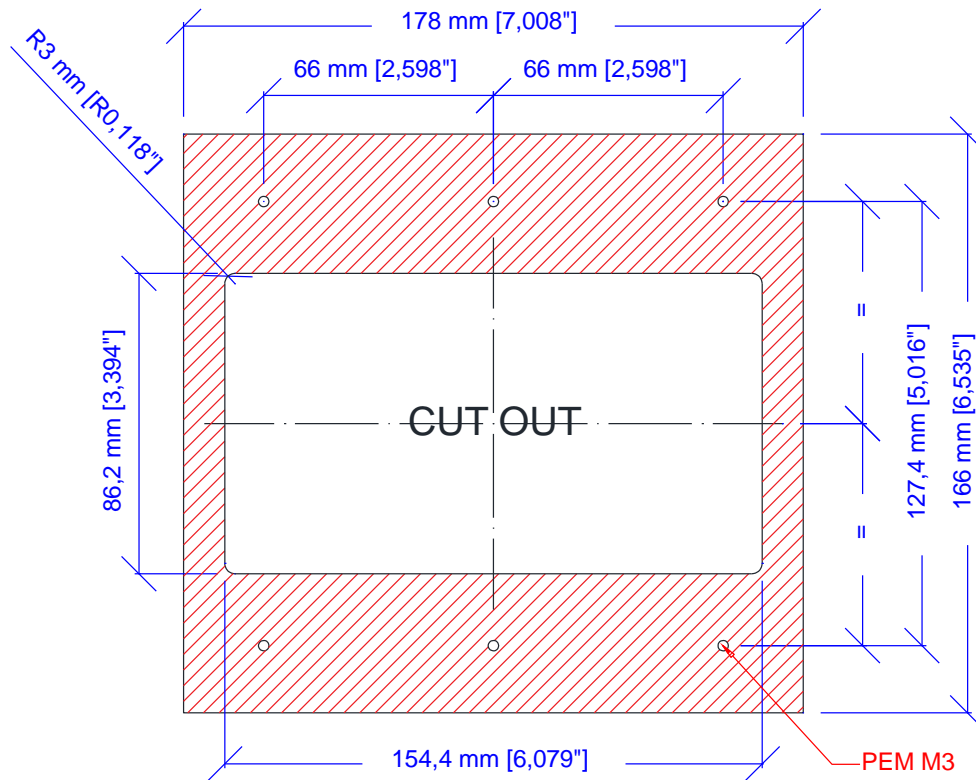

## INTERFACES

### SNV201:ENC

- RS485 serial encoder board (4-wire) to car & landings
- Binary or Gray inputs
- Maximum 32 stops
- Default or configurable service message inputs
- Configure set-up onboard via buttons
- Inbuilt Speech with speaker included (1W or 5W)
- Update speech using .wav files to MicroSD Card

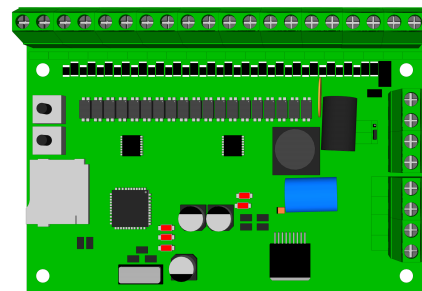

### 1 PER FLOOR

- Direct input to display
- Maximum 10 stops

### PARALLEL INPUT

- Common Positive (Anode)
- Common Negative (Cathode)