



PEW Electrical Distributors

Pushbuttons



ITALO

Square pushbutton with Braille



MAIN FEATURES

- Body: square stainless steel and polycarbonate / nylon push button
- Bezels: deep drawn bezel in stainless steel AISI 304 (gold pvd coated is an optional)
- Pressel: polycarbonate with stainless steel AISI 304 or gold/black, pvd coated finishes; raised legend(s) and Braille
- Mounting: the button is put into the cut out and fixed by a snap fitting from the rear
- Faceplate Thickness: 0,7 mm to 3 mm
- Contacts: 1 micro switch or 2 micro switches
- Wiring: screw terminals or pre-wired connectors (AMP, JST or minispox).
- Illumination: LED 12V or 24V DC 20 mA
- Stroke: 1,2 mm
- Avg. life: 1.500.000 activations
- Degree of protection: IP51
- Complies to EN81-70

FINISHES

INOX
Inox pallinato / Bead blasted stainless steel

PVD
Oro pallinato / Gold bead blasted

PVD
Nero pallinato / Black Bead blasted

ILLUMINATION STYLES



MONOLIGHT
Red



MONOLIGHT
Blue



MONOLIGHT
Green



MONOLIGHT
White



BICOLOR (Standby Halo ON Colour 1, Latched Halo ON Colour 2)
Illumination colours: Red/Blue, Blue/Red, Red/Green, White/Blue, Blue/White, Red/ White, White/Red.


MONOLIGHT
Standby OFF, Latched Halo ON

PEW Electrical Distributors Ltd

Unit 1 The iO Centre
59-71 River Road
Barking, Essex IG11 0DR

0208 507 1001

sales@pewelectrical.com
www.pewelectrical.com

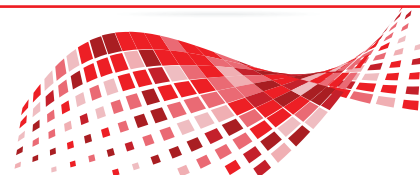

Pushbuttons




SIGNALS / LEGENDS



Hidden Legends



Available signals: alarm, communication established, out of service, present, busy, up and down arrows

DIMENSIONS



20mm Depth

CONNECTIONS

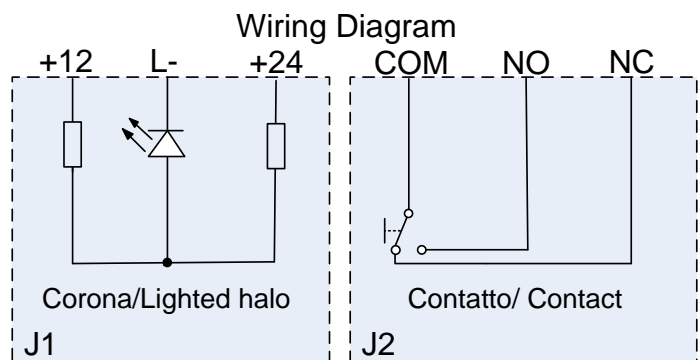

PIN FUNCTION

J1 **+12** : Lighted Halo (+) power supply +12V
+24 : Lighted Halo (+) power supply +24V
L- : Lighted Halo (-)

J2 **COM** : Common Contact.
NC : Normally Closed Contact
NO : Normally Open Contact