




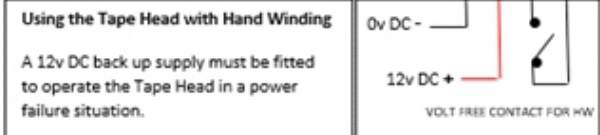

Tape Head Data Sheet

The PEW tape head features 8 N/O and 8 N/C contacts and also has an additional relay output which signals floor level, when combined with channels 1 and 2. This output can also be used to signal hand-winding at floor level. It offers dual switching (110-240V), north and south magnet operation, on-board regulated supply and a clear, plastic lid, which enables observation of the relay operation, thus aiding installation and fault diagnosis.

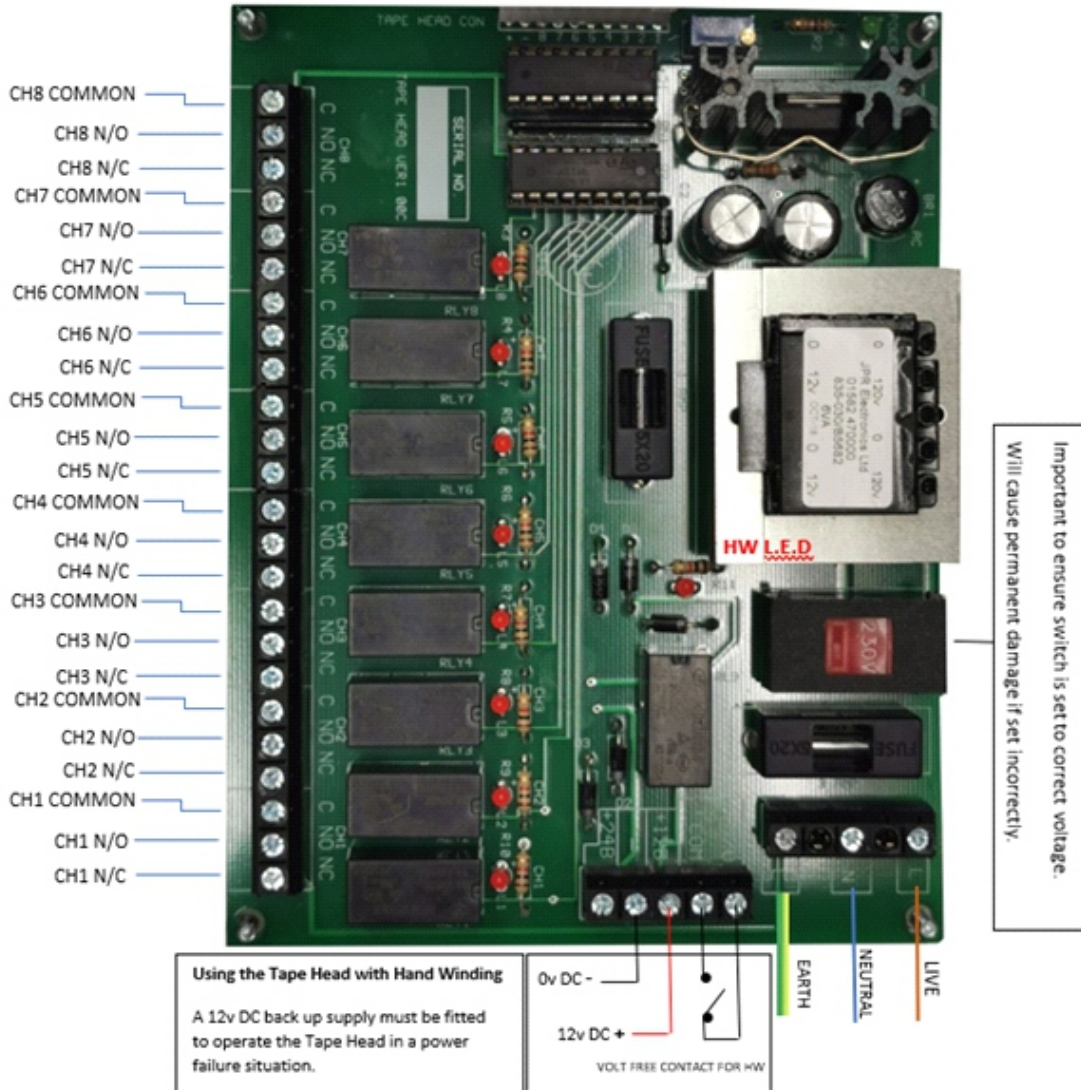

Technical Data

Normalised Supply Voltage	110-240v AC +/-10%
Maximum Switching Voltage	277v AC / 30 DC
Maximum Switching Current	10A AC / 3A AC
Normalised Supply Current	240v AC / 100mA
Normalised Supply Current	12v DC / 400mA
Contact Resistance	100m ohm