

VAPOUR PROOF



Weatherpack LED Fitting





GENERAL DESCRIPTION:


This weather resistant and dustproof CE Marked luminaires. Designed for use in hostile environments, where maximum ingress protection is required.

Luminous Flux	660mm-1700lm, 1268mm-3200lm & 1573mm-4500lm
System Power	660mm-17W, 1268mm-32W & 1573mm-39W
Efficacy	660mm & 1268mm-100 Lm/W, 1573mm-115.4Lm/W
CRI	RA >80
Overall Nominal Dimensions	(660, 1268 & 1573mm) x 106mm x 75mm
IP Rating	IP65
Body	Corrosion Resistant GRP
Colour	Grey
Control Gear	LED Driver
Diffuser	Impact Resistant Acrylic
Installation fixing	Surface or Suspended
Emergency	Three Hour Maintained Emergency (ME3)
Emergency control gear	Liteplan emergency kits.

Model	Power	Input Voltage	CCT	CRI	Luminous Flux	LED Light source specification	L (mm)	W (mm)	H (mm)	LF (mm)
LWP600D	17W	220-240V 50/60Hz	3000K -6500K	≥80	1700lm	SMD2835	660	106	75	375
LWP1200D	32W	220-240V 50/60Hz	3000K -6500K	≥80	3200lm	SMD2835	1268	106	75	800
LWP1500D	39W	220-240V 50/60Hz	3000K -6500K	≥80	4500lm	SMD2835	1573	106	75	1000

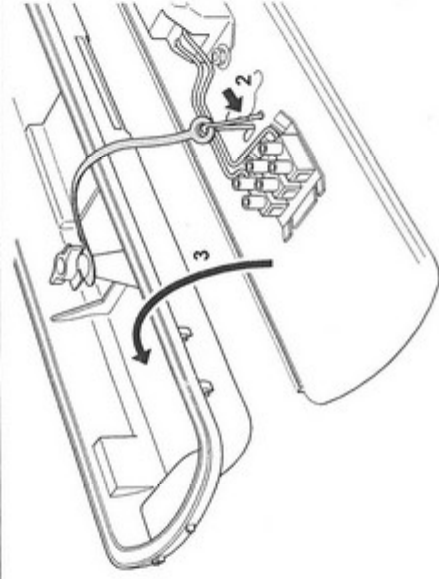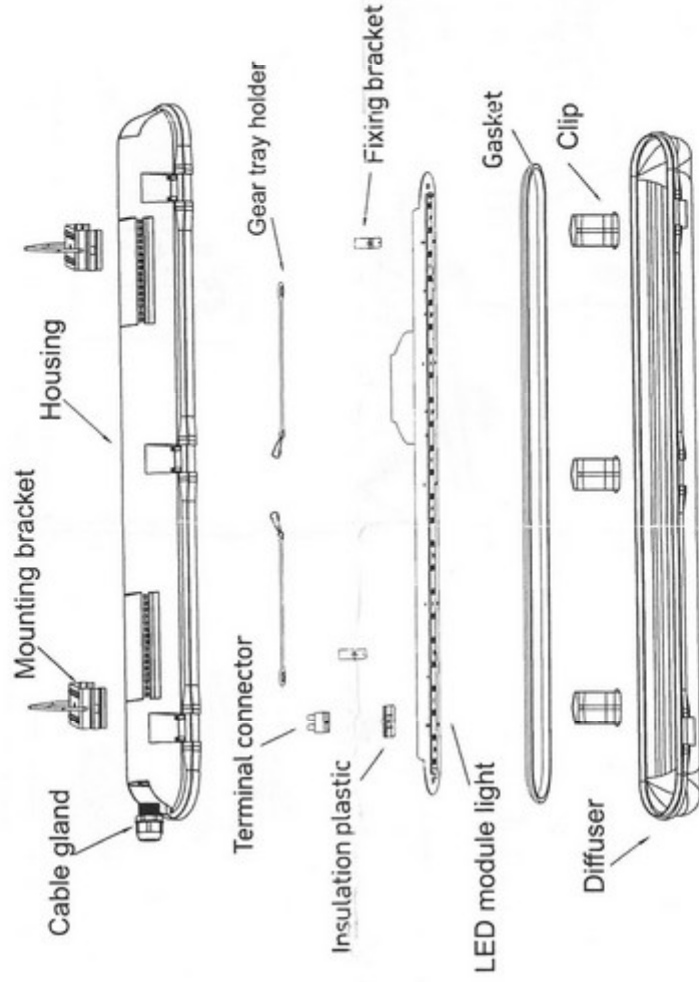

1

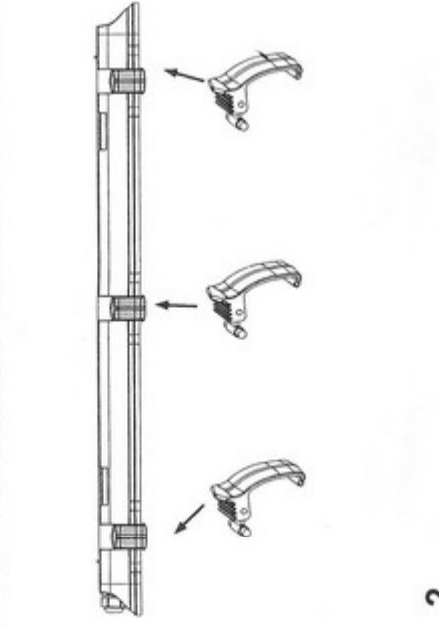

2





IP65


CE




3

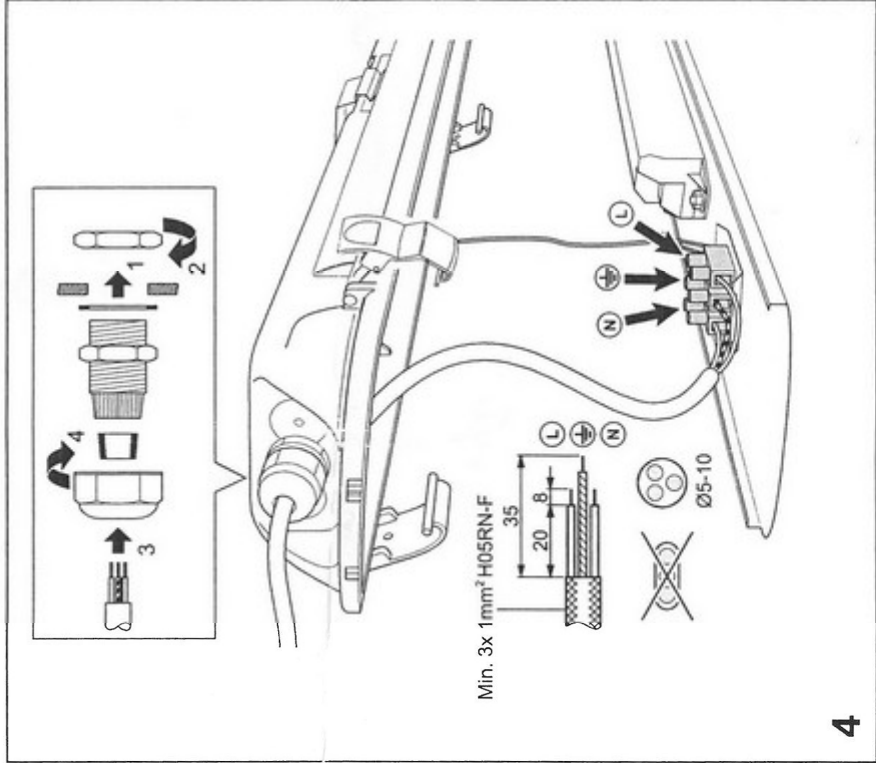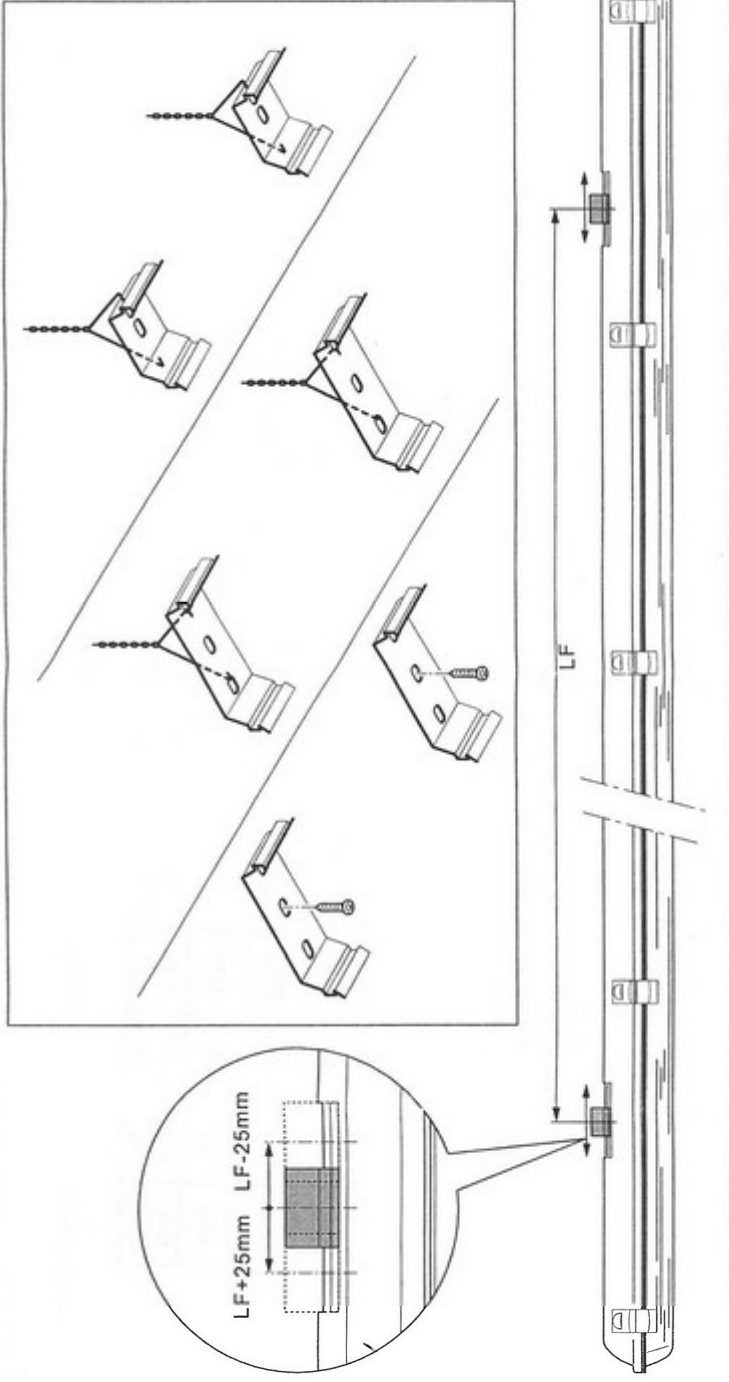

4

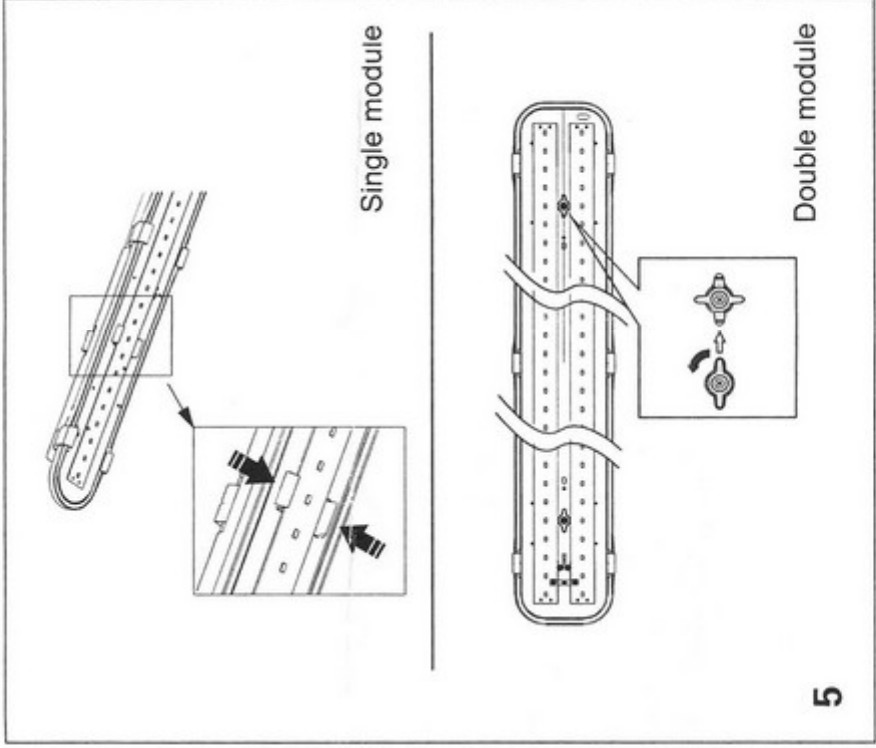

5

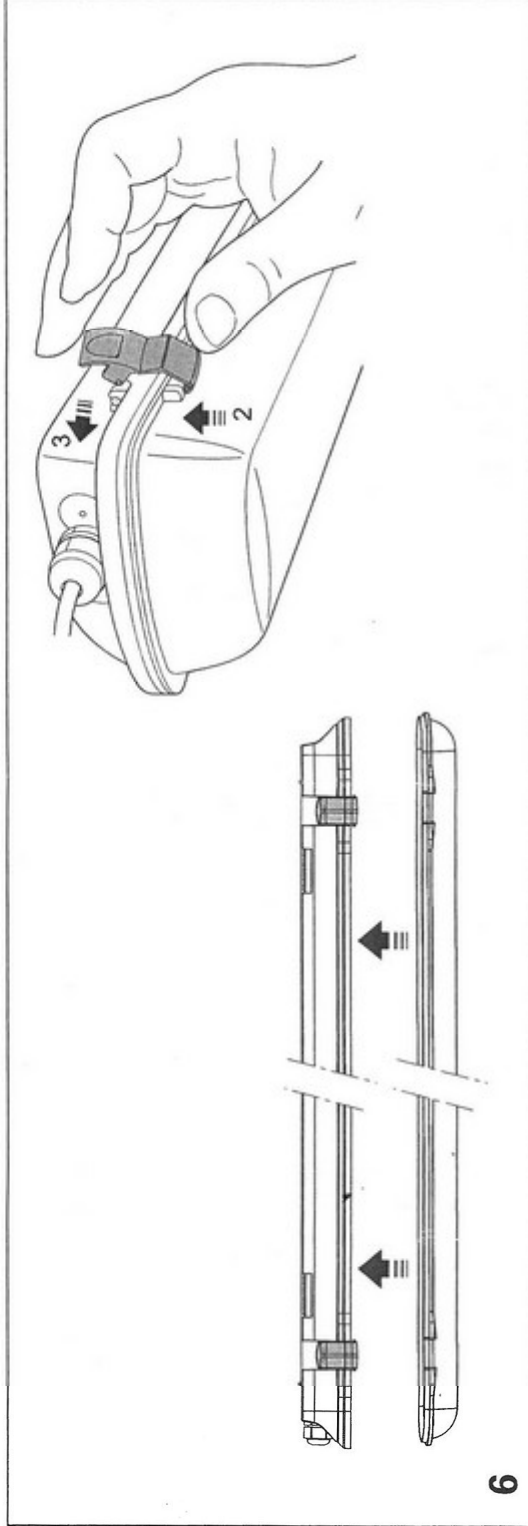

6

SPEEDFIT Range

EU - Declaration of Conformity

WE: Marlow Integrated Designs Ltd. (MID Lighting).

Of: Loudwater House, Loudwater Road, London Road, High Wycombe.

Product Name	Description
WEATHERPACK Range	Surface Mounted IP65 LED Batten

To which this declaration relates, is in conformity with the following directives and standards:

Directive 2014/35/EU Low Voltage Directive	BS EN 60598-1:2015 BS EN 60598-2-2:2012 BS EN 60598-2-22:2014 (Emergency luminaires only) BS EN 62493:2015
Directive 2014/30/EU Electromagnetic Compatibility	BS EN 55015:2013 BS EN 61000-3-2:2014 BS EN 61000-3-3:2013 BS EN 61547:2015
Directive 2009/125/EC Ecodesign Requirements of Energy Related Products	Commission Regulation 1194/2012/EC
Directive 211/65/EU Restriction of the Use of Hazardous Substances (RoHS2)	

Signed

Date: 23/09/2019

Manny Stone
Technical Manager