



ITALIAN STYLE FOR LIFTS

B-LIFT 200 EVO

EN 81-20 EN 81-50

Lift light curtains compliant to EN81-20/50 Standard with self-test function.



MAIN FEATURES

- Size (WxDxH): 10x28x2000mm.
- Detecting Height: 20mm to 1872mm.
- Number of IR diodes: 40.
- Scan beams (distance > 400mm): 194 beams.
- Scan beams (distance < 400mm): 118 beams.
- Opening: 0mm - 4000mm.
- Ideal for both static and dynamic mounting.
- Light Immunity: 100,000 LUX.
- Operating Temperature: -20°C ~ +65°C.
- Buzzer: after continuous detection for 15s buzzer on (when BUZZER SWITCH=ON).
- Cable length: 4 mtr.
- Standard output: relay.
- Test output: relay.
- IP: 54.

MODEL	POWER SUPPLY
B-LIFT 202-E	220 VAC
B-LIFT 218-E	12/24 VDC
B-LIFT 219-E	12/24 VDC (galvanically isolated)


FOCUS




UP TO 194 BEAMS



SELF TEST FUNCTION

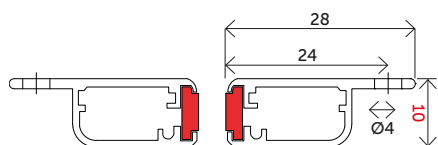

Mechanical profile

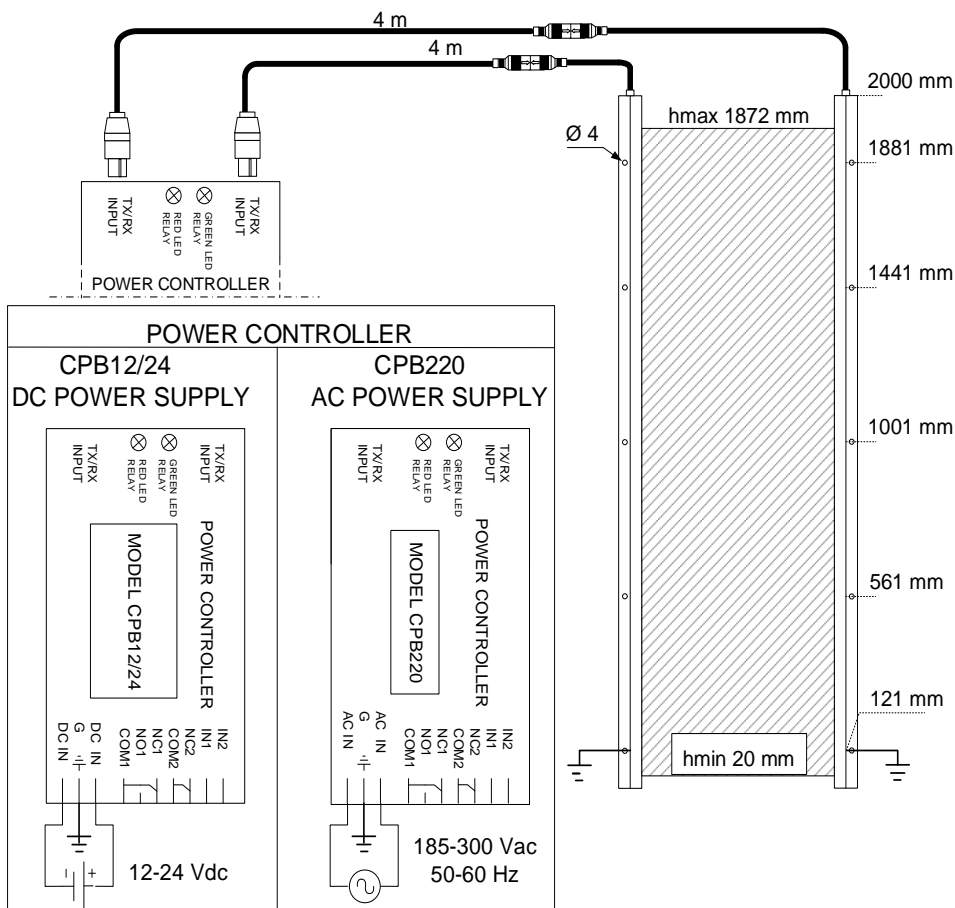

PEW Electrical Distributors Ltd

Unit 1 The iO Centre
59-71 River Road
Barking, Essex IG11 0DR

0208 507 1001

sales@pewelectrical.com
www.pewelectrical.com

